

FOG5200 LED Fiberoptic Illuminator

SPECIFICATIONS

FEATURES

Stand-alone operable
 USB programmable
 Manual, 0-10V and DMX controllable
 Mixed Color or Single Bright White

ELECTRICAL

Input Voltage: 100V-240V AC
 Power Consumption: 120W Max

OPERATING ENVIRONMENT

Ingress Protection: IP20
 Exposure: Dry location
 Operating Temperature: 0° to 40°C
 Storage Temperature: -40° to 70°C
 Airflow: 36 cfm
 Acoustic Noise: 31 dBA

MECHANICAL

Material/Finish: Black iron plate
 Weight: 8.4 lbs
 Dimensions: 11.8" x 5.3" x 4.3"
 AC input connector: IEC 60320 C14

MOUNTING


OK to mount in any orientation
 Best orientation is with exhaust vent facing up
 Keep vents free from obstruction



OPTICAL PERFORMANCE

Device Color	Port Lumens*	Minimum CRI
Mixed RGBA	650/1100/500/520lm	NA
Mixed RGBW	650/1100/500/1250lm	NA
2800K White	3850lm	85
3000K White	3950lm	85
4200K White	4050lm	85
4400K White	4200lm	85
5000K White	4300lm	85
6500K White	4450lm	75

*Typical value at 25°C ambient

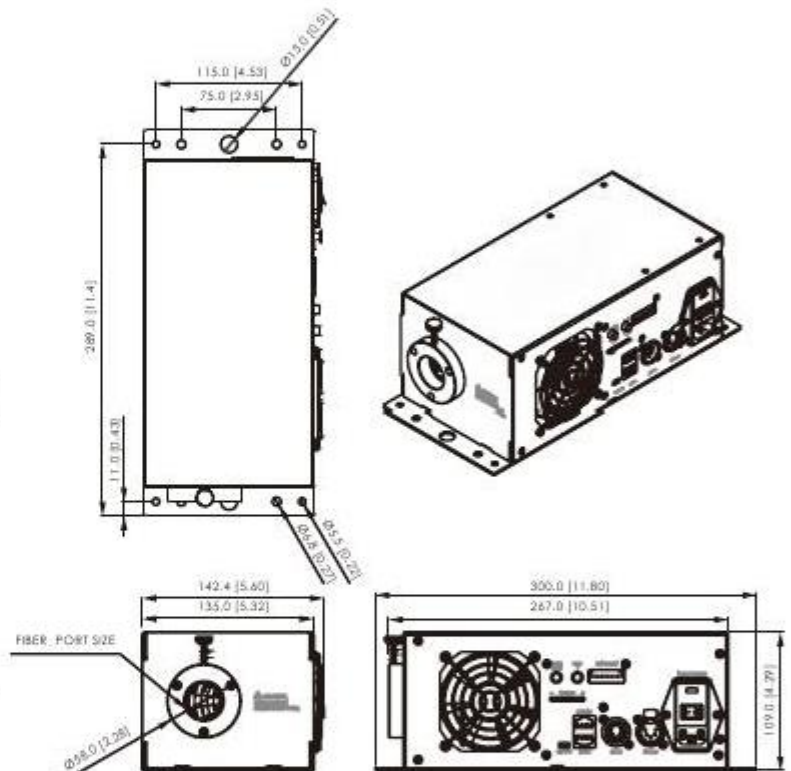

ORDERING GUIDE

FOG5200	—	<input type="text"/>	—	<input type="text"/>	—	<input type="text"/>	—	<input type="text"/>
		Device Color		Fiber Port Size		Homogenizer		Twinkle Wheel
		MA Mixed RGBA		30 30mm		N No Homogenizer		NT No Twinkle Wheel
		MW Mixed RGBW		33 33mm		H With homogenizer		TW With Twinkle Wheel
		2800 2800K White						
		3000 3000K White						
		4200 4200K White						
		4400 4400K White						
		5000 5000K White						
		6500 6500K White						

FIBER CAPACITY: Using 0.75mm Diameter Fiber: 700 fibers max in 30mm Fiber Port, 1000 fibers max in 33mm Fiber Port. Large Core outer diameter: 30mm for 30mm Fiber Port, 33mm for 33mm Fiber Port. Accessories offered for common end diameters less than 30mm and 33mm: ACS30-xx and ACS33-xx.
HOMOGENIZER: Homogenizer is suggested when using stranded fiber to ensure each strand is illuminated equally in intensity and color.

Example: FOG5200-MA-30-N-NT