

FOG Fiber Stik



SPECIFICATIONS

An acrylic fixture used to create points of light in the bottom of pools, ponds and water features. Available in five diameters to allow variation in the visible point size.

Each Fiber Stik is comprised of two pieces, a universal base and a stem. The base is 1 3/4" in diameter and the fixtures' overall height is 3 1/4". The stem can be trimmed flush with the pool surface at any height over 1/2".

The Fiber Stik is finished in light frost to allow the entire stem to glow when used in applications other than water features.

Fiber Stik fixtures are part of a system comprised of the fixtures, fiber optic cable, and illuminator(s).




Fixture Sizes

Part Number	Diameter (in.)	Diameter (mm)
FS - 3	1/8"	3 mm
FS - 6	1/4"	6 mm
FS - 10	3/8"	10 mm
FS - 13	1/2"	13 mm
FS - 19	3/4"	19 mm

*Nominal Dimensions

FS-3

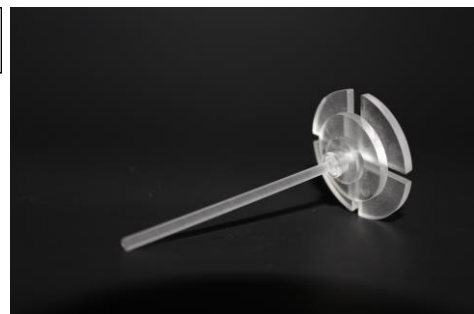

FS-10



ORDERING GUIDE

FOG	—	—	—	—
	Fixture Size	Preferred Fiber Cable Size	Length of Fiber Cable	Max. # of Fixtures / Illuminator
FS 3	1/8", 3mm	2 Strand	Length of Fiber cable in feet.	450
FS 6	1/4", 6mm	4 Strand		225
FS 10	3/8", 10mm	4 Strand		225
FS 13	1/2", 13mm	7 Strand	Max. recommended length is 60 feet.	128
FS 19	3/4", 19mm	12 Strand		75

Example: FOG-FS6-4-50-225